



Lighting system

Optic: Opal diffusor
Mid power SMD LEDs
Lifetime: 40 000 h (L-70)
Beam angle: 120°
3 years guarantee

Applications

Indoor places, offices
shopp, hotels

Options


Dimm.: Triac
Color temp.: 3000K, 5000K



Features

Polimer body
Meets CE safety standards
Protection rating: IP40
Passive cooling

Ordering Code	Product Name	Light Output [lm]	CRI	System Power [W]	Color Temp. [K]	Power Supply [V]	Weight [Kg]
301 057	LT-UP SOU-250-12W/840	1 180	>80	12	4 000	230 AC	0,73
301 054	LT-UP SOU-300-18W/840	1 700	>80	18	4 000	230 AC	0,9

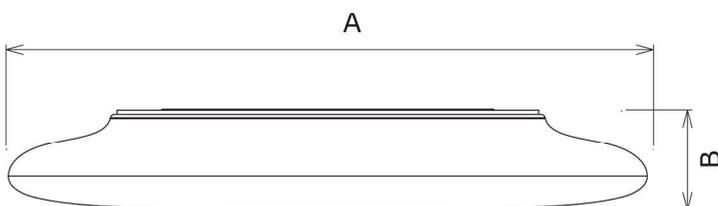

sizes

Ordering Code	AxB [mm]
301 057	Ø250x48
301 054	Ø300x48