

Lighting system

Optic: opal diffusor
Mid power SMD LEDs
Lifetime: 50 000 h (L-70)

Applications

Indoor places, offices,
public areas, hotels


Features

Passive cooling
Meets CE safety standards
Extruded aluminium body
Protection rating: IP20

Options

Dimming: DALI
1-10V, touch dimm

Ordering Code	Product Name	Light Output [lm]	CRI	System Power [W]	Color Temp. [K]	Power Supply [V]	Weight [Kg]
301 189	LT-LVO LUMIAIR-930-1200	4215	>90	50	3 000	230 AC	3,5
301 190	LT-LVO LUMIAIR-940-1200	4215	>90	50	4 000	230 AC	3,5
301 191	LT-LVO LUMIAIR-940-1500	5268	>90	63	4 000	230 AC	3,7
301 192	LT-LVO LUMIAIR-930-1500	5268	>90	63	3 000	230 AC	3,7

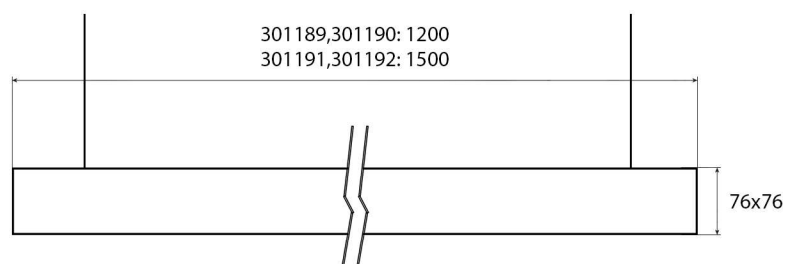

sizes