



Lighting system

Optic: Opal diffusor
SMD LED
Lifetime: 50 000 h (L-70)
Beam angle: 90°
UGR<16

Applications

Indoor places,
shopping centers
malls, hotels


Features

Bended steel body
Meets CE safety standards
Protection rating: IP20
Passive cooling


5 years guarantee



Ordering Code	Product Name	Light Output [lm]	CRI	System Power [W]	Color Temp. [K]	Power Supply [V]	Weight [Kg]
301 249	LT-UP LUPA 6060 35 840	3 870	>80	35	4 000	230 AC	3

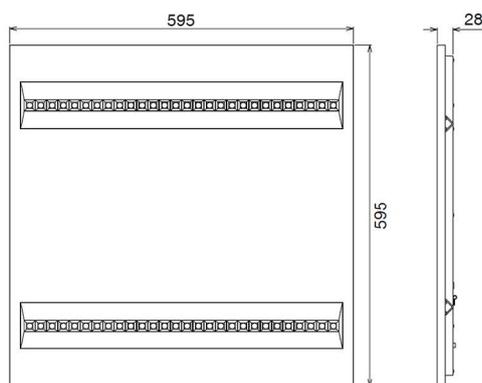

sizes

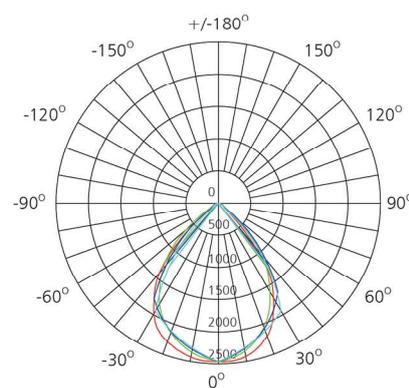

AVERAGE BEAM ANGLE (50%): 78.1DEG

UNIT: cd

- C0/180, 79.0 deg
- C30/210, 78.7 deg
- C60/240, 79.0 deg
- C90/270, 75.5 deg