

Lighting system

Optic: Opal diffusor
Mid power SMD LEDs
Lifetime: 50 000 h (L-70)
Glare rating: UGR<19

Applications


Indoor places,
offices, malls

Features


Passive cooling
Meets CE safety standards
Protection rating: IP40

5 years guarantee

Ordering Code	Product Name	Light Output [lm]	CRI	System Power [W]	Color Temp. [K]	Power Supply [V]	Weight [Kg]
301230	LLT-UP POLLY 60x60 UGR19	3 900	>80	30	4 000	230 AC	1,5

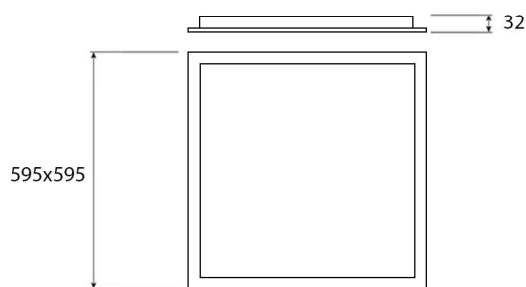

sizes

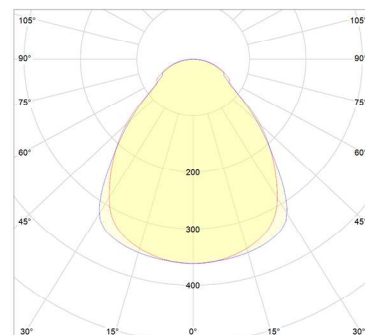

cd/klm: c0-180 c90-270