



Lighting system

Optic: Opal diffusor
Mid power SMD LEDs
Lifetime: 50 000 h (L-70)
Beam angle: 120°

Applications

Indoor places,
Offices, schools,
Shopping malls



Features

Passive cooling
Meets CE safety standards
Protection rating: IP20




5 year warranty

Ordering Code	Product Name	Light Output [lm]	CRI	System Power [W]	Color Temp. [K]	Power Supply [V]	Weight [Kg]
301252	LT-UP ROUNDY 40 930	3 000	>90	35	3 000	230 AC	3.1

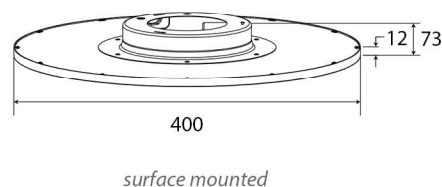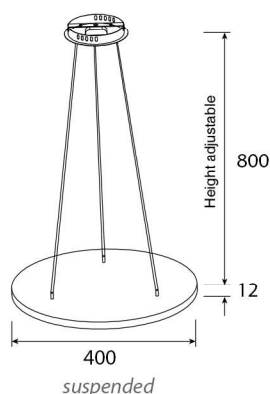

sizes

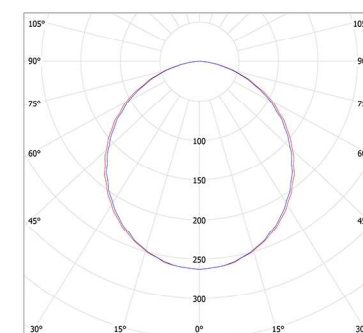

cd/klm: c0-180 c90-270