



### Lighting system

Optic: Opal diffusor  
Mid power SMD LEDs  
Lifetime: 50 000 h (L-70)  
Beam angle: 140°

### Applications

Outdoor places,  
parking area,  
food industry


### Features

Passive cooling  
Meets CE safety standards  
Protection rating: IP66, IK10




5 year warranty

Ordering Code	Product Name	Light Output [lm]	CRI	System Power [W]	Color Temp. [K]	Power Supply [V]	Size A [mm]	Weight [Kg]
301253	LT-UP GROWEE L1300 840	4 500	>80	40	4 000	230 AC	1300	0.8

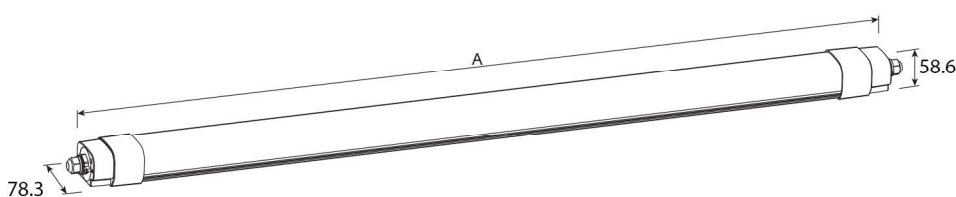

sizes

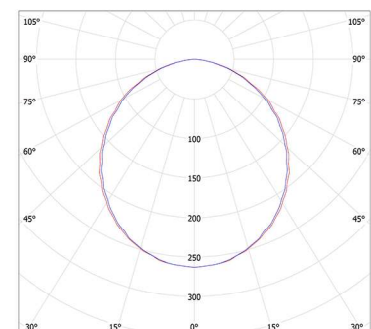

cd/klm: c0-180 c90-270