



Features


- Round lens for open area application
- Oval lens for escape route application
- High power & efficiency LED
- Surface or recessed mounting
- LiFePO4 battery
- Protection rating: IP20

Applications



Indoor places, offices,
malls, hotels



Ordering Code	Product Name	Light Output [lm]	Discharge Duration	Test Mode	System Power [W]	CRI	Color Temp. [K]	Battery
301 212	LT-EP-MAAD-EM2-6W-3H	450	3h	AT	6	>70	5 000	9.6V 1500mAh

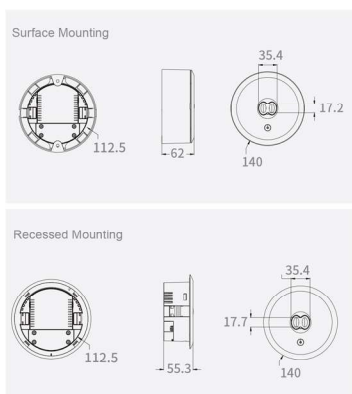

sizes

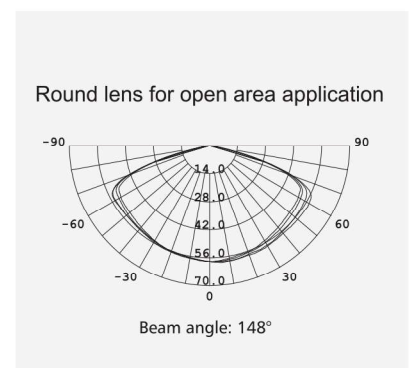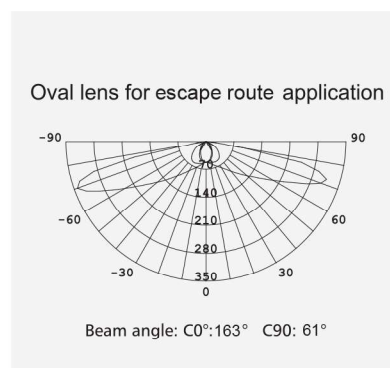

beam angles