

## VERO

Süllyesztett LED mélysugárzó  
LED downlight

### SZERELÉSI ÚTMUTATÓ

A lámpatest telepítését és karbantartását csak képzett szakember végezheti! Kérjük, vegye figyelembe a LED fényforrás élettartamára vonatkozó előírásokat! Sérült üveget azonnal ki kell cserélni! A garancia azonnal érvényét veszti, ha a vevő a lámpatesten a gyártó előzetes engedélye nélkül bármilyen módosítást végez! Szakszerűtlen felszerelésből vagy extrém üzemeltetési körülményekből származó meghibásodás esetén a garancia érvényét veszti!

A szerelési útmutatót kérjük, őrizze meg!

MAXIMÁLIS KÖRNYEZETI HŐMÉRSÉKLET 35 °C



### INSTALLATION INSTRUCTION

The luminaire may only be installed and maintained by qualified technicians! Please pay attention to LED light-source lifetime! The damaged or broken glass must be replaced immediately!

Any modifications of the luminaire structure without supplier's permission can end product guarantee! In case of any failure caused by unprofessional installation or operating under extreme conditions the product may end!

Please retain these instructions for later reference!

MAXIMUM AMBIENT TEMPERATURE 35 °C



## Installation Procedure

### WARNING

1. Switch off before installation.
2. Switch on only after complete installation and examination of the circuit.
3. Professional electrician for installation and maintenance only.



**Turn Off  
Power Supply**


Turn Off power supply before starting any installation. Read instructions & check you have all the tools & accessories to complete the installation correctly.

### Installation

#### Step 1

#### CUT-OUT


- 301286 - Ø70-80mm
- 301287 - Ø70-80mm
- 301288 - 90-95x90-95mm
- 301289 - 95-100x95-100mm
- 301290 - Ø145-150mm

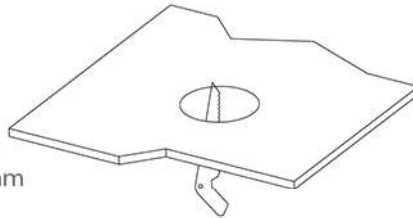


Open a hole according to the cutout size of LED downlight.

#### Step 2

Use screw-driver to open the driver terminal cover, feed the main AC wire L. N. in terminal block respectively, then fix the cover back.




#### Step 3

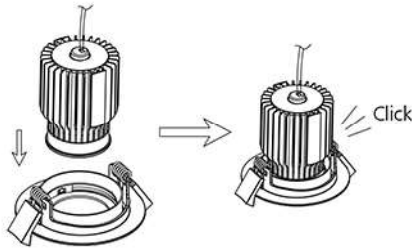


Insert the module into the trim cover.

#### Step 4

Connect the downlight with driver, hold back the spring clip then push the downlight into the hole.



#### Step 5

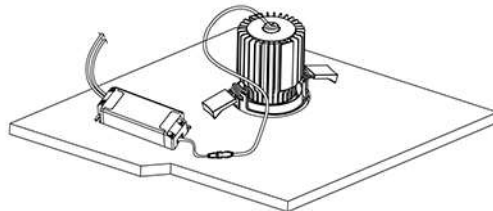

Make sure the downlight fixed tightly in ceiling, turn on the power.

301284  
301285

**LED** IP20

