



Lighting system

Optic: Opal diffusor
Mid power SMD LEDs
Lifetime: 50 000 h (L-70)
Beam angle: 100°
UGR<19



Applications



Inside places,
Shopping malls,
Offices

Features

Passive cooling
Loopable design
Meets CE safety standards
Protection rating: IP20

5 year warranty

Ordering Code	Product Name	Light Output [lm]	CRI	System Power [W]	Color Temp. [K]	Power Supply [V]	Weight [Kg]
301300	LT-UP AVIC104A-120 840	4 500	>80	40	4 000	230 AC	4.9

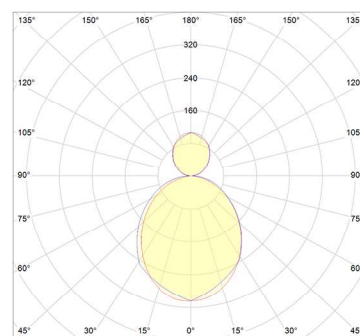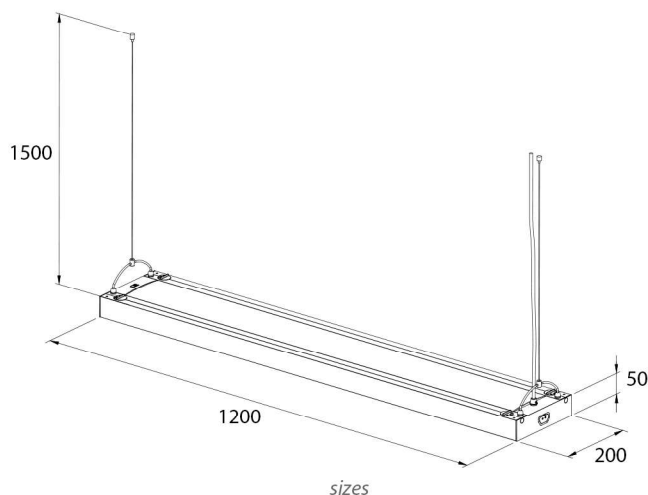

cd/klm: c0-180 c90-270