



### Lighting system


Optic: Opal diffusor  
Mid power SMD LEDs  
Lifetime: 50 000 h (L-70)  
Beam angle: 100°

### Applications

Inside places,  
Shopping malls,  
Offices


### Features

Passive cooling  
Loopable design  
Meets CE safety standards  
Protection rating: IP20

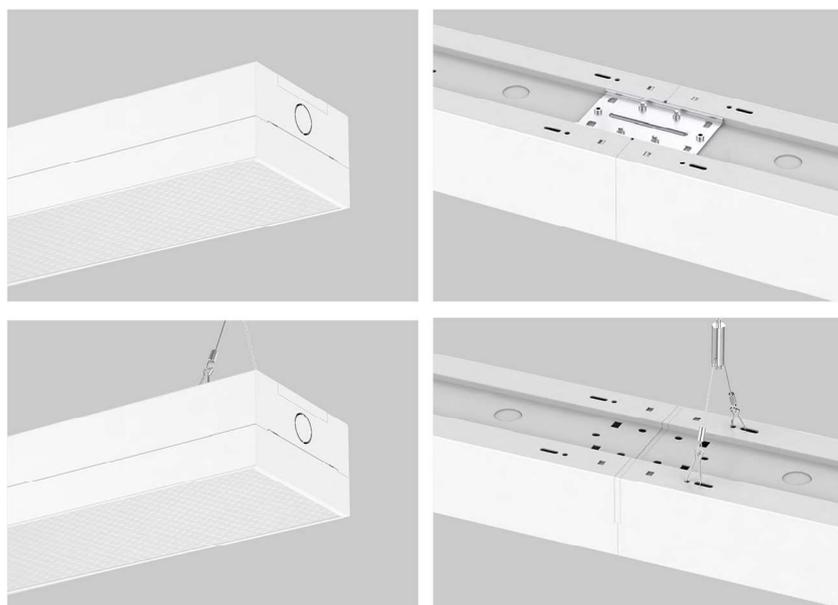


5 year warranty

Ordering Code	Product Name	Light Output [lm]	CRI	System Power [W]	Color Temp. [K]	Power Supply [V]	Weight [Kg]
301301	LT-UP EWLY105-120 840	4 500	>80	38	4 000	230 AC	2.47

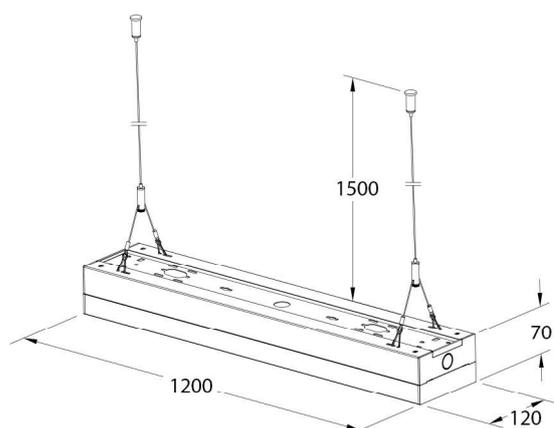

sizes

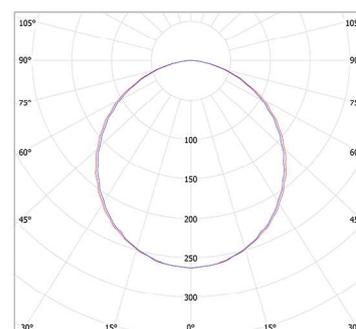

cd/klm: c0-180 c90-270