

### Lighting system

Optic: Opal diffusor  
Mid power SMD LEDs  
Lifetime: 50 000 h (L-70)  
Glare rating: UGR<19

### Applications


Indoor places,  
shopping centers,  
malls, hotels

### Features


Passive cooling  
Meets CE safety standards  
Protection rating: IP40

5 years guarantee

Ordering Code	Product Name	Light Output [lm]	CRI	System Power [W]	Color Temp. [K]	Power Supply [V]	Weight [Kg]
301 269	LT-UP POLLY 60x60 UGR19	3 880	>80	30	3000	230 AC	1,5

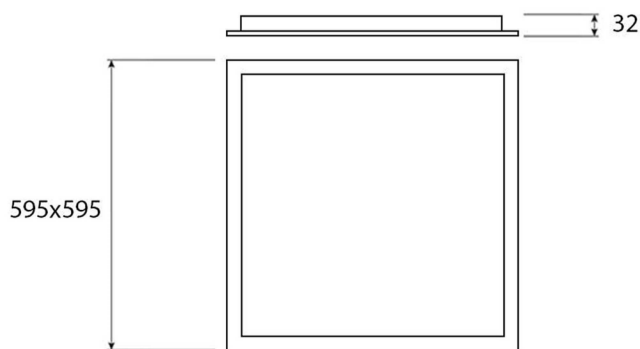

sizes

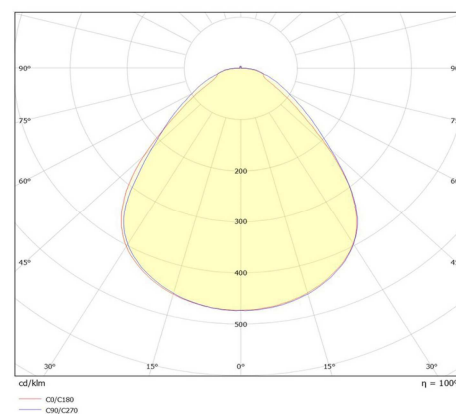

cd/klm: c0-180 c90-270