



### Lighting system

Optic: Opal diffusor  
Mid power SMD LEDs  
Lifetime: 50 000 h (L-70)

### Applications

Outdoor places,  
wall lighting


### Features

Passive cooling  
Meets CE safety standards  
Die-cast alu body  
Protection rating: IP66


### Options

Dimm: 1-10V, Motion sensor,  
Daylight sensor  
Color temp.: 5000K

Ordering Code	Product Name	Light Output [lm]	CRI	System Power [W]	Color Temp. [K]	Power Supply [V]	Weight [Kg]
301 080	LT-SOL RONA - 40 - 830	4 900	>80	40	3 000	230 AC	3,9
301 078	LT-SOL RONA - 40 - 840	5 200	>80	40	4 000	230 AC	3,9
301 081	LT-SOL RONA - 70 - 830	8 700	>80	70	3 000	230 AC	3,9
301 079	LT-SOL RONA - 70 - 840	9 100	>80	70	4 000	230 AC	3,9

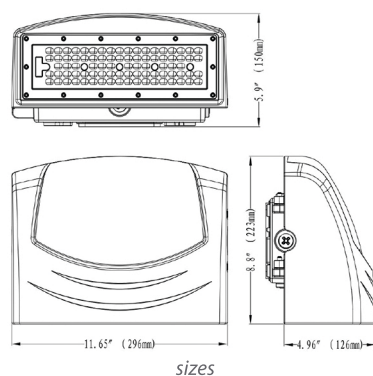

sizes

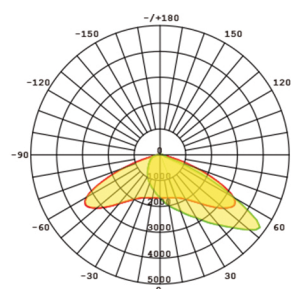

cd/klm: c0-180 c90-270