



Lighting system

Optic: Opal diffusor
Mid power SMD LEDs
Lifetime: 50 000 h (L-70)

Applications

Outdoor places, flood lighting,
building walls, board lighting

Features


Passive cooling
Meets CE safety standards
Die-cat alu body
Protection rating: IP66
Install: sq pole 50x50 or Ø60mm

Options


Dimm: DALI, 1-10V
CRI >80



Ordering Code	Product Name	Light Output [lm]	CRI	System Power [W]	Color Temp. [K]	Power Supply [V]	Weight [Kg]
301 090	LT-SOL SYLLA-100-740	12 350	>70	100	4 000	230 AC	7
301 091	LT-SOL SYLLA-100-750	13 000	>70	100	5 000	230 AC	7
301 092	LT-SOL SYLLA-150-740	17 800	>70	150	4 000	230 AC	7,3
301 093	LT-SOL SYLLA-150-750	18 750	>70	150	5 000	230 AC	7,3
301 094	LT-SOL SYLLA-200-740	23 750	>70	200	4 000	230 AC	7,4
301 095	LT-SOL SYLLA-200-750	25 000	>70	200	5 000	230 AC	7,4
301 096	LT-SOL SYLLA-240-740	27 400	>70	240	4 000	230 AC	7,5
301 097	LT-SOL SYLLA-240-750	28 800	>70	240	5 000	230 AC	7,5

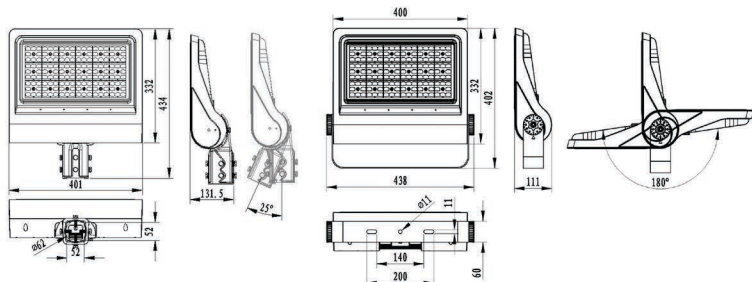

sizes

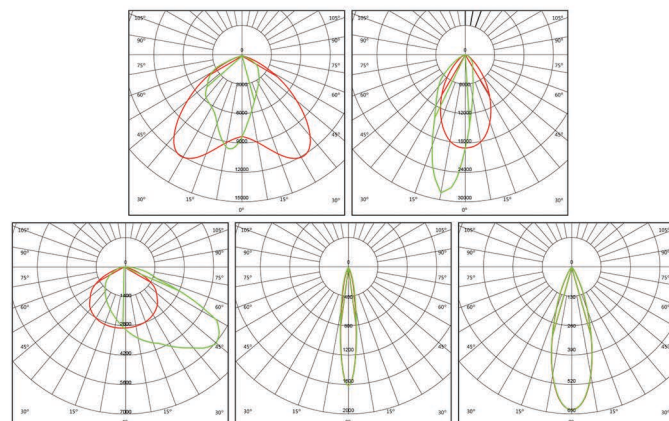

photometric diagrams