



Lighting system

Optic: Polimer lens
Mid power SMD LEDs
Lifetime: 50 000 h (L-70)

Applications

Indoor places, shopping halls,
industrial areas, malls

Features


Passive cooling
Meets CE safety standards
Extruded aluminium body
Protection rating: IP20

Options


Dimming: DALI
Color temp.: 5000K



Ordering Code	Product Name	Light Output [lm]	CRI	System Power [W]	Color Temp. [K]	Power Supply [V]	Weight [Kg]
301 105	LT-AG CONTYS-I-40-830	4 680	>80	20	3 000	230 AC	2,2
301 106	LT-AG CONTYS-I-40-840	4 940	>80	20	4 000	230 AC	2,2
301 107	LT-AG CONTYS-I-65-830	7 605	>80	30	3 000	230 AC	2,2
301 108	LT-AG CONTYS-I-65-840	8 027	>80	30	4 000	230 AC	2,2
301 109	LT-AG CONTYS-I-75-830	8 775	>80	50	3 000	230 AC	2,2
301 110	LT-AG CONTYS-I-75-840	9 263	>80	50	4 000	230 AC	2,2

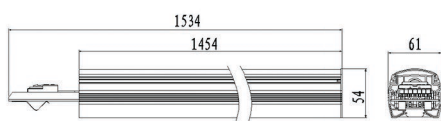

sizes

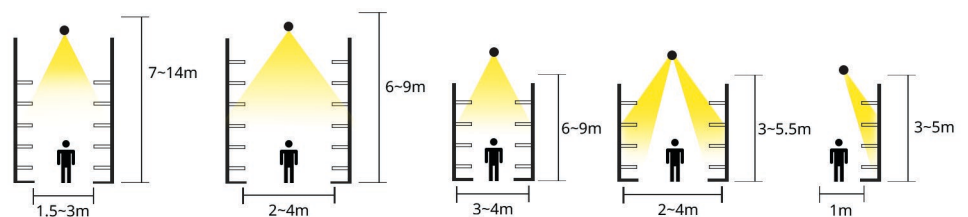

C101



C102



C103



C104



C105