



Lighting system

Optic lenses 160°
High brightness power LEDs
Lifetime: 50 000 h (L-70)

Applications


Outdoor places,
streetlighting

Features


Passive cooling
Meets CE safety standards
Die-cat alu body
IK08, IP66

Options


Dimm: DALI, 1-10V
CRI >80

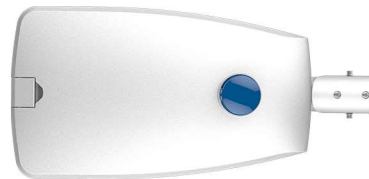

Ordering Code	Product Name	Light Output [lm]	CRI	System Power [W]	Color Temp. [K]	Power Supply [V]	Weight [Kg]
301 173	LT-AG-Thango-20W 740	2 500	>70	20	4 000	230 AC	4,1
301 173	LT-AG-Thango-50W 740	6 500	>70	50	4 000	230 AC	6,5
301 173	LT-AG-Thango-120W 740	15 600	>70	120	4 000	230 AC	8,5
301 173	LT-AG-Thango-150W 740	18 750	>70	150	4 000	230 AC	8,5

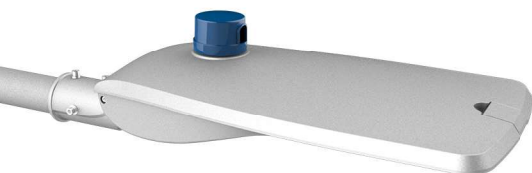

301 173 - 623x222x150mm
301 172 - 680x282x160mm
301 171 - 763x352x167mm
301 170 - 763x352x167mm

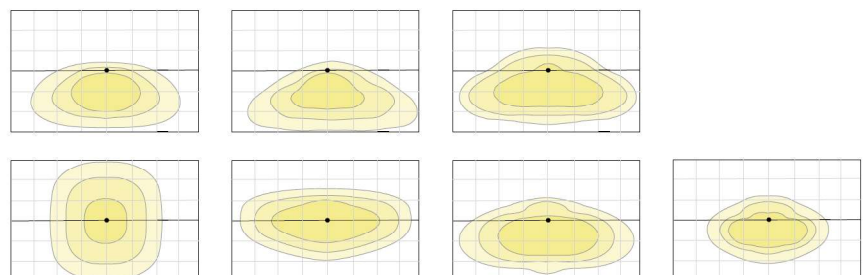

sizes

light distribution